

**PRESTATIEVERKLARING****DoP 0235**

voor fischer nail anchor FNA II (mechanisch anker voor gebruik in beton)

NL

1. <u>Unieke identificatiecode van het producttype:</u>	<b>DoP 0235</b>	
2. <u>Beoogd(e) gebruik(en):</u>	<b>Achteraf geplaatste ankers voor toepassing in beton voor redundante systemen</b>	
3. <u>Fabrikant:</u>	<b>Zie bijlage, met name de bijlagen fischerwerke GmbH &amp; Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Duitsland</b>	
4. <u>Gemachtigde:</u>	<b>-</b>	
5. <u>Het systeem of de systemen voor de beoordeling en verificatie van de prestatiebestendigheid:</u>	<b>2+</b>	
6. <u>Europees beoordelingsdocument:</u>	<b>EAD 330747-00-0601, Edition 06/2018 ETA-06/0175; 2021-03-02 DIBt- Deutsches Institut für Bautechnik 2873 TU Darmstadt</b>	
7. <u>Aangegeven prestatie(s):</u>		
<b>Veilig gebruik (BWR 4)</b> Kenmerkende weerstand tegen spanningsbelasting (statische en quasi-statische belasting):	Weerstand tegen staalbreuk:	NPD
	Weerstand tegen uittrekken:	NPD
	Weerstand tegen betonnen kegelbreuk:	NPD
	Robuustheid	Bijlage C1
	Minimale rand- en hartafstand: Randafstand om spleetbreuk onder belasting te voorkomen:	Bijlagen B2, C1 NPD
Kenmerkende weerstand tegen schuifbelasting (statische en quasi-statische belasting):	Weerstand tegen staalbreuk (afschuifbelasting): Weerstand tegen uitbreken (pryout): Weerstand tegen bezwijken van betonranden:	NPD NPD NPD
Karakteristieke weerstand voor alle belasting richtingen en bezwijkmechanismen voor vereenvoudigd ontwerp.	Karakteristieke weerstand:	Bijlage C1
Duurzaamheid:	Duurzaamheid:	Bijlagen A2, B1
<b>Veiligheid in geval van brand (BWR 2)</b> Reactie op brand: Weerstand tegen vuur:	Klasse (A1) Weerstand bij brand, staalbreuk (trekbelasting): Weerstand bij brand, uitbreken, (trekbelasting): Weerstand bij brand, staalbreuk (afschuifbelasting):	NPD NPD NPD
Brandwerendheid voor alle belastingsrichtingen en faalwijzen:	Bijlage C2	



8. Geëigende technische documentatie en/of specifieke – technische documentatie:

De prestaties van het hierboven omschreven product zijn conform de aangegeven prestaties. Deze prestatieverklaring wordt in overeenstemming met Verordening (EU) nr. 305/2011 onder de exclusieve verantwoordelijkheid van de hierboven vermelde fabrikant verstrekt.

Ondertekend voor en namens de fabrikant door:

Dr. Oliver Geibig, Managing Director Business Units & Engineering  
Tumlingen, 2021-03-16

Jürgen Grün, Managing Director Chemistry & Quality

Deze DoP is opgesteld in meerdere talen. In het geval van geschillen over de interpretatie zal de Engelse tekst altijd prevaleren.

Het aanhangsel bevat vrijwillige en aanvullende informatie in het Engels die de (taal-neutraal gespecificeerde) wettelijke vereisten overschrijdt.

## **Specific Part**

### **1 Technical description of the product**

The fischer nail anchor FNA II is an anchor made of galvanised (FNA II) or stainless steel (FNA II R) or high corrosion resistant steel (FNA II HCR). The anchor is pushed into a predrilled cylindrical drill hole and expanded by loading.

The product description is given in Annex A.

### **2 Specification of the intended use in accordance with the applicable European Assessment Document**

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### **3 Performance of the product and references to the methods used for its assessment**

#### **3.1 Safety in case of fire (BWR 2)**

<b>Essential characteristic</b>	<b>Performance</b>
Reaction to fire	Class A1
Resistance to fire	See Annex C 2

#### **3.2 Safety in use (BWR 4)**

<b>Essential characteristic</b>	<b>Performance</b>
Characteristic resistance to tension and shear load (static and quasi-static loading)	See Annex B 2 and C 1
Durability	See Annex B 1


### **4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base**

In accordance with European Assessment Document EAD No. 330747-00-0601, the applicable European legal act is: [97/161/EC].

The system to be applied is: 2+


**Only for multiple use for non-structural applications according to  
EAD 330747-00-0601**

**Design types:**




Nail head

FNA II 6x25/..  
FNA II 6x30/..




Nail head RB

FNA II 6x25/.. RB  
FNA II 6x30/.. RB




Threaded bolt with ISO  
standard metric thread  
M6

FNA II 6x25 M6/..  
FNA II 6x30 M6/..



Threaded bolt with ISO  
standard metric thread  
M8


FNA II 6x25 M8/..  
FNA II 6x30 M8/..

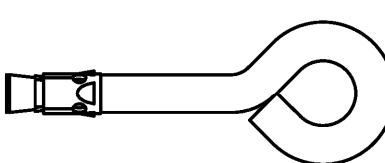

FNA II OE with eye

FNA II 6x25 OE  
FNA II 6x30 OE

**Intended use:**

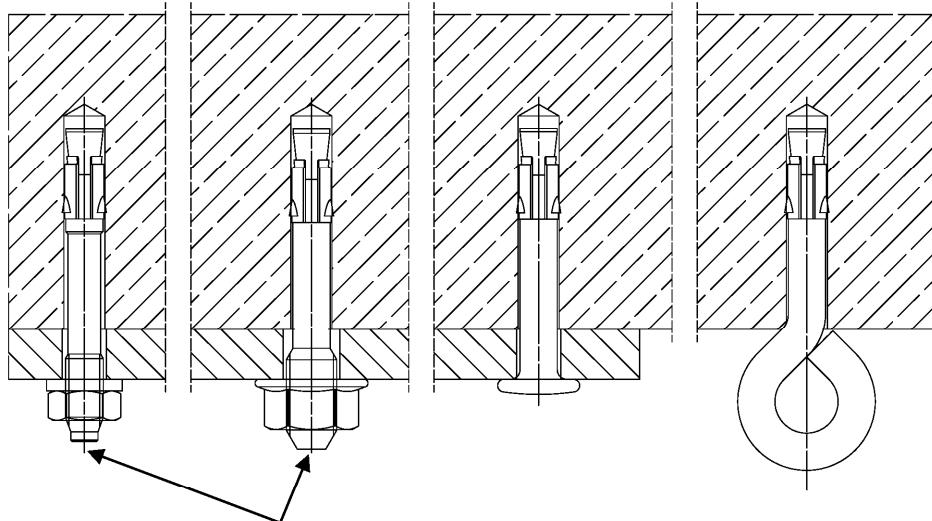

Additional marking only galvanised steel for  $h_{ef} = 25$  mm (centring, bar or points)

(Fig. not to scale)

**fischer nail anchor FNA II**

**Product description**


Product and intended use

**Annex A 1**

Appendix 2 / 8

## Marking:

Nail head




Marking at **X**: "O" for  $h_{ef} = 25$  mm  
and "I" for  $h_{ef} = 30$  mm;

Marking at **Y**:  $t_{fix}$

Marking at **Z**: "R" or "HCR" (stainless steel)


## Expansion sleeve (or bolt)

e.g.:



For stainless steel additional marking "R" or "HCR"

## Shaft (threaded bolt)




Marking e.g.: 6/10  
thread size/thickness of the fixture

## Marking-Codes for **Y**:

	A	Q	T	N	P	B	L	H	U
$t_{fix}$	5	10	15	20	25	30	35	40	45
	D	V	S	W	X	E	M	Z	K
$t_{fix}$	50	55	60	65	70	75	80	85	90
	(A)	F	(B)	(D)	(E)	G	J		
$t_{fix}$	95	100	105	110	115	120	125		


At  $t_{fix} > 125$  mm the corresponding figure is marked.



Marking e.g.: 8/10  
thread size /thickness of the fixture  
Exception: 8/5 no marking

**Table A2.1: Materials FNA II**

Part	Designation	Material		
		FNA II	FNA II R	FNA II HCR
Steel grade	Steel	Stainless steel R		High corrosion resistant steel HCR
	Zinc plated $\geq 5 \mu\text{m}$ , ISO 4042:2018	Acc. to EN 10088:2014 Corrosion resistance class CRC III acc. to EN 1993-1-4:2015		Acc. to EN 10088:2014 Corrosion resistance class CRC V acc. to EN 1993-1-4:2015
1	Expansion sleeve	Cold strip, EN 10139:2016 or stainless steel EN 10088:2014	Stainless steel EN 10088:2014	Stainless steel EN 10088:2014
2	Cone bolt	Cold form steel or free cutting steel		High corrosion resistant steel EN 10088:2014

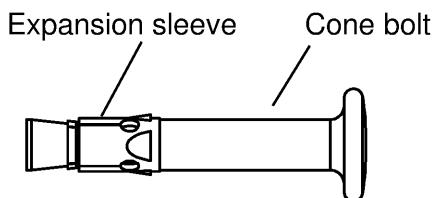

(Fig. not to scale)

## fischer nail anchor FNA II

**Product description**  
Marking and materials

## Annex A 2

## Specifications of intended use

### **Fastenings subject to:**

Size	FNA II, FNA II R, FNA II HCR
Hammer drilling with standard drill bit	
Static and quasi-static loads	All types
Cracked and uncracked concrete	✓
Fire exposure	

### **Base materials:**

- Compacted reinforced and unreinforced normal weight concrete without fibres (cracked and uncracked) according to EN 206:2013+A1:2016
- Strength classes C12/15 to C50/60 according to EN 206:2013+A1:2016

### **Use conditions (Environmental conditions):**

- Structures subject to dry internal conditions (FNA II, FNA II R, FNA II HCR) with  $h_{ef} \geq 25$  mm
- For all other conditions according to EN 1993-1-4:2006 + A1:2015 corresponding to corrosion resistance class
  - CRC III: for FNA II R with  $h_{ef} \geq 30$  mm
  - CRC V: for FNA II HCR with  $h_{ef} \geq 30$  mm

### **Design:**

- Fastenings are to be designed under the responsibility of an engineer experienced in fastenings and concrete work
- Verifiable calculation notes and drawings have to be prepared taking account of the loads to be anchored. The position of the fastener is indicated on the design drawings (e.g. position of the fastener relative to reinforcement or to supports, etc.)
- Simplified design method C according to EN 1992-4:2018 Annex G

### **Installation:**

- Fastener installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters on site
- Use of the fastener only as supplied by the manufacturer without exchanging the components of the fastener
- Checking before placing the fastener to ensure that the strength class of the concrete in which the fastener is to be placed, is in the range given and is not lower than that of the concrete to which the characteristic loads apply
- Check of concrete being well compacted, e.g. without significant voids
- Drill hole created perpendicular +/- 5° to concrete surface, positioning without damaging the reinforcement
- In case of aborted hole: new drilling at a minimum distance twice the depth of the aborted drill hole or smaller distance if the aborted drill hole is filled with high strength mortar (e.g. FIS HB, FIS SB, FIS EM Plus, FIS V Plus) and if under shear or oblique tension load it is not in the direction of load application

**fischer nail anchor FNA II**


**Intended Use  
Specifications**

**Annex B 1**

Appendix 4 / 8

**Table B2.1: Installation parameters**

Effective embedment depth	$h_{ef} \geq$	[mm]	25	30
Nominal drill bit diameter	$d_0 =$		6	
Cutting diameter of drill bit	$d_{cut,max} \leq$		6,4	
Depth of drill hole	$h_0 \geq$		31	36
Diameter of clearance hole in the fixture for all FNA II except for M8 and OE	$d_f \leq$		7	
Diameter of clearance hole in the fixture for M8	$d_f \leq$		9	
Maximum torque moment (only threaded types)	max. $T_{inst} \leq$	[Nm]	4	
Minimum thickness of member	$h_{min}$	[mm]	80	
Maximum thickness of fixture	max. $t_{fix}$		400	

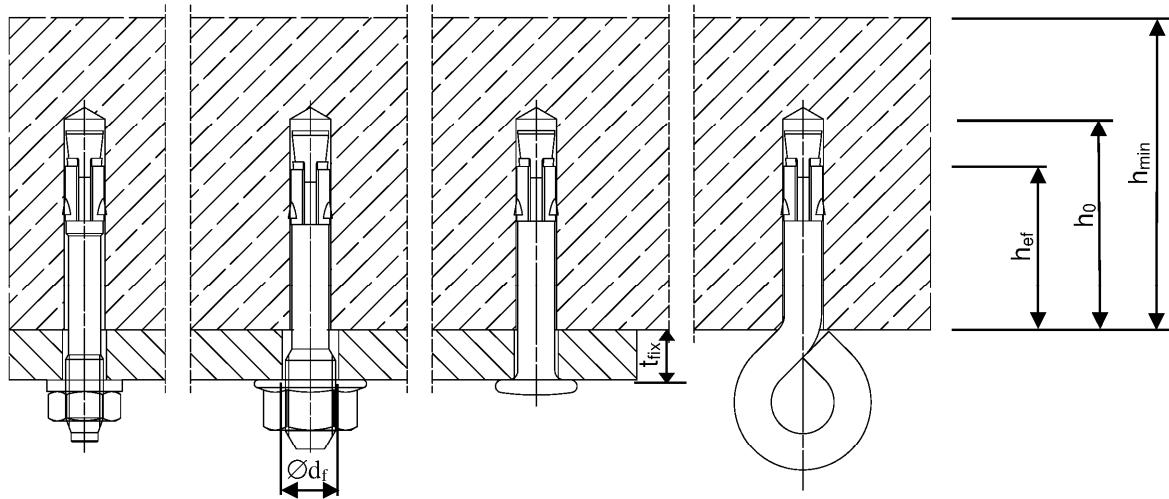

(Fig. not to scale)

**fischer nail anchor FNA II**

**Intended Use**  
Installation parameters


**Annex B2**

Appendix 5 / 8

## Installation instruction:


### Drill the hole

Push through installation




### Clean the hole

2







### Set the fastener

3










### Apply max. $T_{inst}$

4



Pre-positioned installation



(Fig. not to scale)

**fischer nail anchor FNA II**

**Intended Use**

Installation instruction

**Annex B 3**

Appendix 6 / 8

**Table C1.1:** Characteristic resistance of a fixing point<sup>1)</sup> for all load directions

**Table C2.1:** Characteristic resistance of a fixing point<sup>2)</sup> under fire exposure in concrete C20/25 to C50/60

**Characteristic resistance under fire exposure for all load directions for  $h_{ef} = 25 \text{ mm}$**

Type of anchor	Spacing	Edge distance	Effective anchorage depth	Characteristic resistance $F_{Rk,fi} [\text{kN}]$			
	$s_{cr,fi} \geq [\text{mm}]$	$c_{cr,fi} \geq [\text{mm}]$	$h_{ef} \geq [\text{mm}]$	R 30	R 60	R 90	R 120
FNA II 6x25/..	100	50	25	0,6	0,5	0,3	0,3
FNA II 6x25 M6/..				0,6	0,35		
FNA II 6x25 M8/..				0,3	0,2		
FNA II 6x25 OE				0,3	0,2		

**Characteristic resistance under fire exposure for all load directions for  $h_{ef} = 30 \text{ mm}$**

Type of anchor	Spacing	Edge distance	Effective anchorage depth	Characteristic resistance $F_{Rk,fi} [\text{kN}]$			
	$s_{cr,fi} \geq [\text{mm}]$	$c_{cr,fi} \geq [\text{mm}]$	$h_{ef} \geq [\text{mm}]$	R 30	R 60	R 90	R 120
FNA II 6x30/..	120	60	30	0,9	0,8	0,5	0,3
	100	50		0,6	0,35		
FNA II 6x30 M6/..	120	60	30	0,9	0,7	0,3	0,3
	100	50		0,6	0,35		
FNA II 6x30/.. R/HCR	120	60	30	0,9	0,7	0,5	0,5
	100	50		0,6	0,35		
FNA II 6x30 M6/.. R/HCR	120	60	30	0,9	0,7	0,5	0,5
	100	50		0,6	0,35		
FNA II 6x30 OE R/HCR	100	50		0,3	0,2		0,1

**Characteristic resistance under fire exposure for all load directions for  $h_{ef} = 30 + 5^1) \text{ mm}$**

Type of anchor	Spacing	Edge distance	Effective anchorage depth	Characteristic resistance $F_{Rk,fi} [\text{kN}]$			
	$s_{cr,fi} \geq [\text{mm}]$	$c_{cr,fi} \geq [\text{mm}]$	$h_{ef} \geq [\text{mm}]$	R 30	R 60	R 90	R 120
FNA II 6x30/.. R/HCR	140	70	30+5 <sup>1)</sup>	1,3	1,0	0,7	0,7
	100	50		0,7	0,7		

**Characteristic resistance under fire exposure for shear load without level arm**

Type of anchor	Characteristic resistance $M^0_{Rk,s,fi} [\text{Nm}]$			
	R 30	R 60	R 90	R 120
FNA II 6x25 OE/..	0,2	0,1	0,08	0,07
FNA II 6x25/..; FNA II 6x25 .. RB; /..	0,9	0,7	0,4	0,3
FNA II 6x25 M6/..; FNA II 6x25 M8/.. / ..	0,3	0,2	0,2	0,2
FNA II 6x30/..; FNA II 6x30 .. RB; /.. R/HCR	4,4	2,0	1,2	0,8
FNA II 6x30 M6/..; FNA II 6x30 M8/.. /.. R/HCR	2,8	1,3	0,8	0,5

<sup>1)</sup> The effective anchorage depth  $h_{ef} = 30 + 5 \text{ mm}$  is reached by setting the anchor FNA II 6x30/... 5 mm deeper with an anchor that is 5 mm longer than required for the actual thickness of the fixture.

<sup>2)</sup> A fixing point is defined as a single anchor or a group of 2 or 4 anchors

In case of fire attack from more than one side, the edge distance shall be  $c_{fi,min} \geq 300 \text{ mm}$

**fischer nail anchor FNA II**

**Performances**

Characteristic resistance under fire exposure

**Annex C 2**